

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
13 May 2004 (13.05.2004)

PCT

(10) International Publication Number
WO 2004/040180 A1

(51) International Patent Classification⁷: **F16K 31/18**,
31/34, 21/18, 31/20, 24/00, 24/02, 17/02, B67D 5/34

(72) Inventor; and

(75) Inventor/Applicant (for US only): **SMIT, Peter, Mar-**
tin [AU/AU]; 9 Killeen Close, Buderim, Queensland 4556
(AU).

(21) International Application Number:

PCT/AU2003/001436

(22) International Filing Date: 30 October 2003 (30.10.2003)

(74) Agent: **FISHER ADAMS KELLY**; Level 13 AMP Place,
10 Eagle Street, Brisbane, Queensland 4000 (AU).

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2002952390 31 October 2002 (31.10.2002) AU


(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE,
GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR,
KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK,
MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT,
RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(71) Applicant (for all designated States except US): **MULTI-**
FLO AUSTRALIA PTY LTD [AU/AU]; 4 Daniel Street,
Caloundra, Queensland 4551 (AU).

(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

[Continued on next page]

(54) Title: VALVE ASSEMBLY

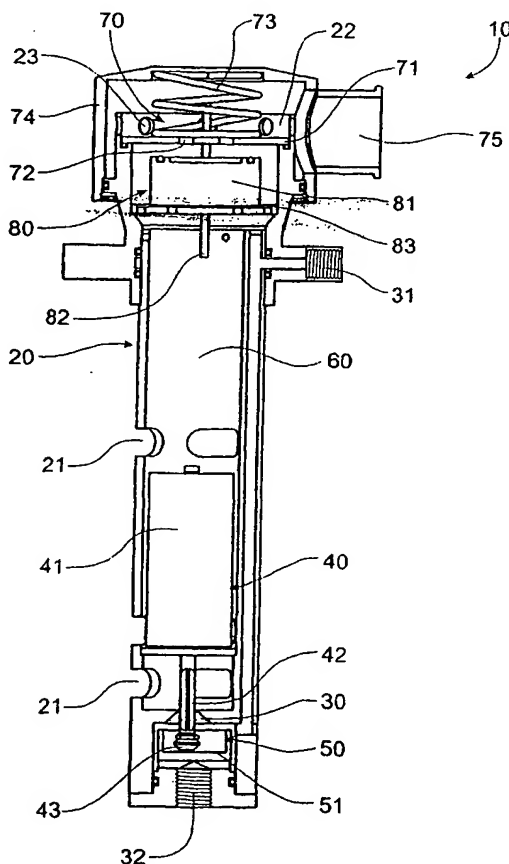

(57) Abstract: A valve assembly (10) able to be mounted with a liquid container, the valve assembly comprising: a housing (20) having a passageway (60) that extends through the housing; a breather float valve (80) mounted within the housing, the breather float valve movable between an open position to allow gas to pass through the passageway and a closed position that prevents liquid from passing through the passageway; a liquid inlet (30), forming part of the housing, the liquid inlet allowing fluid to pass into the housing; and an inlet float valve (41) mounted within the housing, the inlet float valve movable between an open position that permits the flow of liquid through the liquid inlet and a closed position that prevents the flow of fluid through the liquid inlet.